



#### Standard Features

- Incorporates a silent ratchet system
- Transportation wheels
- Roller wheels with brake
- Standard forks
- Telescopic mast design
- Solid Steel base

#### Options Features

- Adjustable Forks
- Flat Forks
- Boom
- Pipe cross Forks
- Load Platform
- Anti-fall function


Model	KLP-10	KLP-15	KLP-20	KLP-25
<b>Measurements</b>				
<b>Working height</b>				
(1)standard forks-up	3.48 m	5.00 m	6.45m	7.95m
(2)standard forks-down	2.96 m	4.48 m	5.93m	7.43m
Adjustable forks-up	3.48m	5.00m	6.45m	7.95m
Adjustable forks-down	2.96m	4.48m	5.93m	7.43m
Flat forks	2.96m	4.48 m	—	—
Boom***	3.28m	4.76 m	6.25m	7.42m
Load platform**-fork up	3.49m	4.98 m	6.46m	7.94m
Load platform**-fork down	2.97m	4.46 m	5.94m	7.42m
(3)Height-stowed	1.98m	1.98m	1.98m	1.98m
(4)Length-stowed	0.75m	0.75m	0.75m	0.83m
(5)Length-operating	2.2m	2.2m	2.2m	2.2m
(6)Width-stowed*	0.79m	0.79m	0.79m	0.79m
-stabilizers lowered	1.9m	1.9m	1.9m	1.9m
<b>Width-straddle base*</b>				
Minimum	0.80m	0.80m	—	—
Maximum	1.47m	1.47m	—	—
Maximum inside	1.27m	1.27m	—	—
(7)Ground clearance-center	0.05m	0.05m	0.05m	0.05m
Load height minimum	0.15m	0.15m	0.15m	0.15m
<b>Productivity</b>				
<b>Load capacity</b>				
46cm load center	454kg	363kg	363kg	295kg
61cm load center	454kg	363kg	272kg	204kg
1.07m load center	181kg	227kg	159kg	113kg
<b>Power</b>				
Power	Single speed winch			
<b>Weight</b>				
Standard	163kg	183kg	203kg	224kg

\*Outside dimensions.

\*\*For use with standard and adjustable forks only.

\*\*\*Measured from ground to bottom of shackle.

KLP Collecting Chart

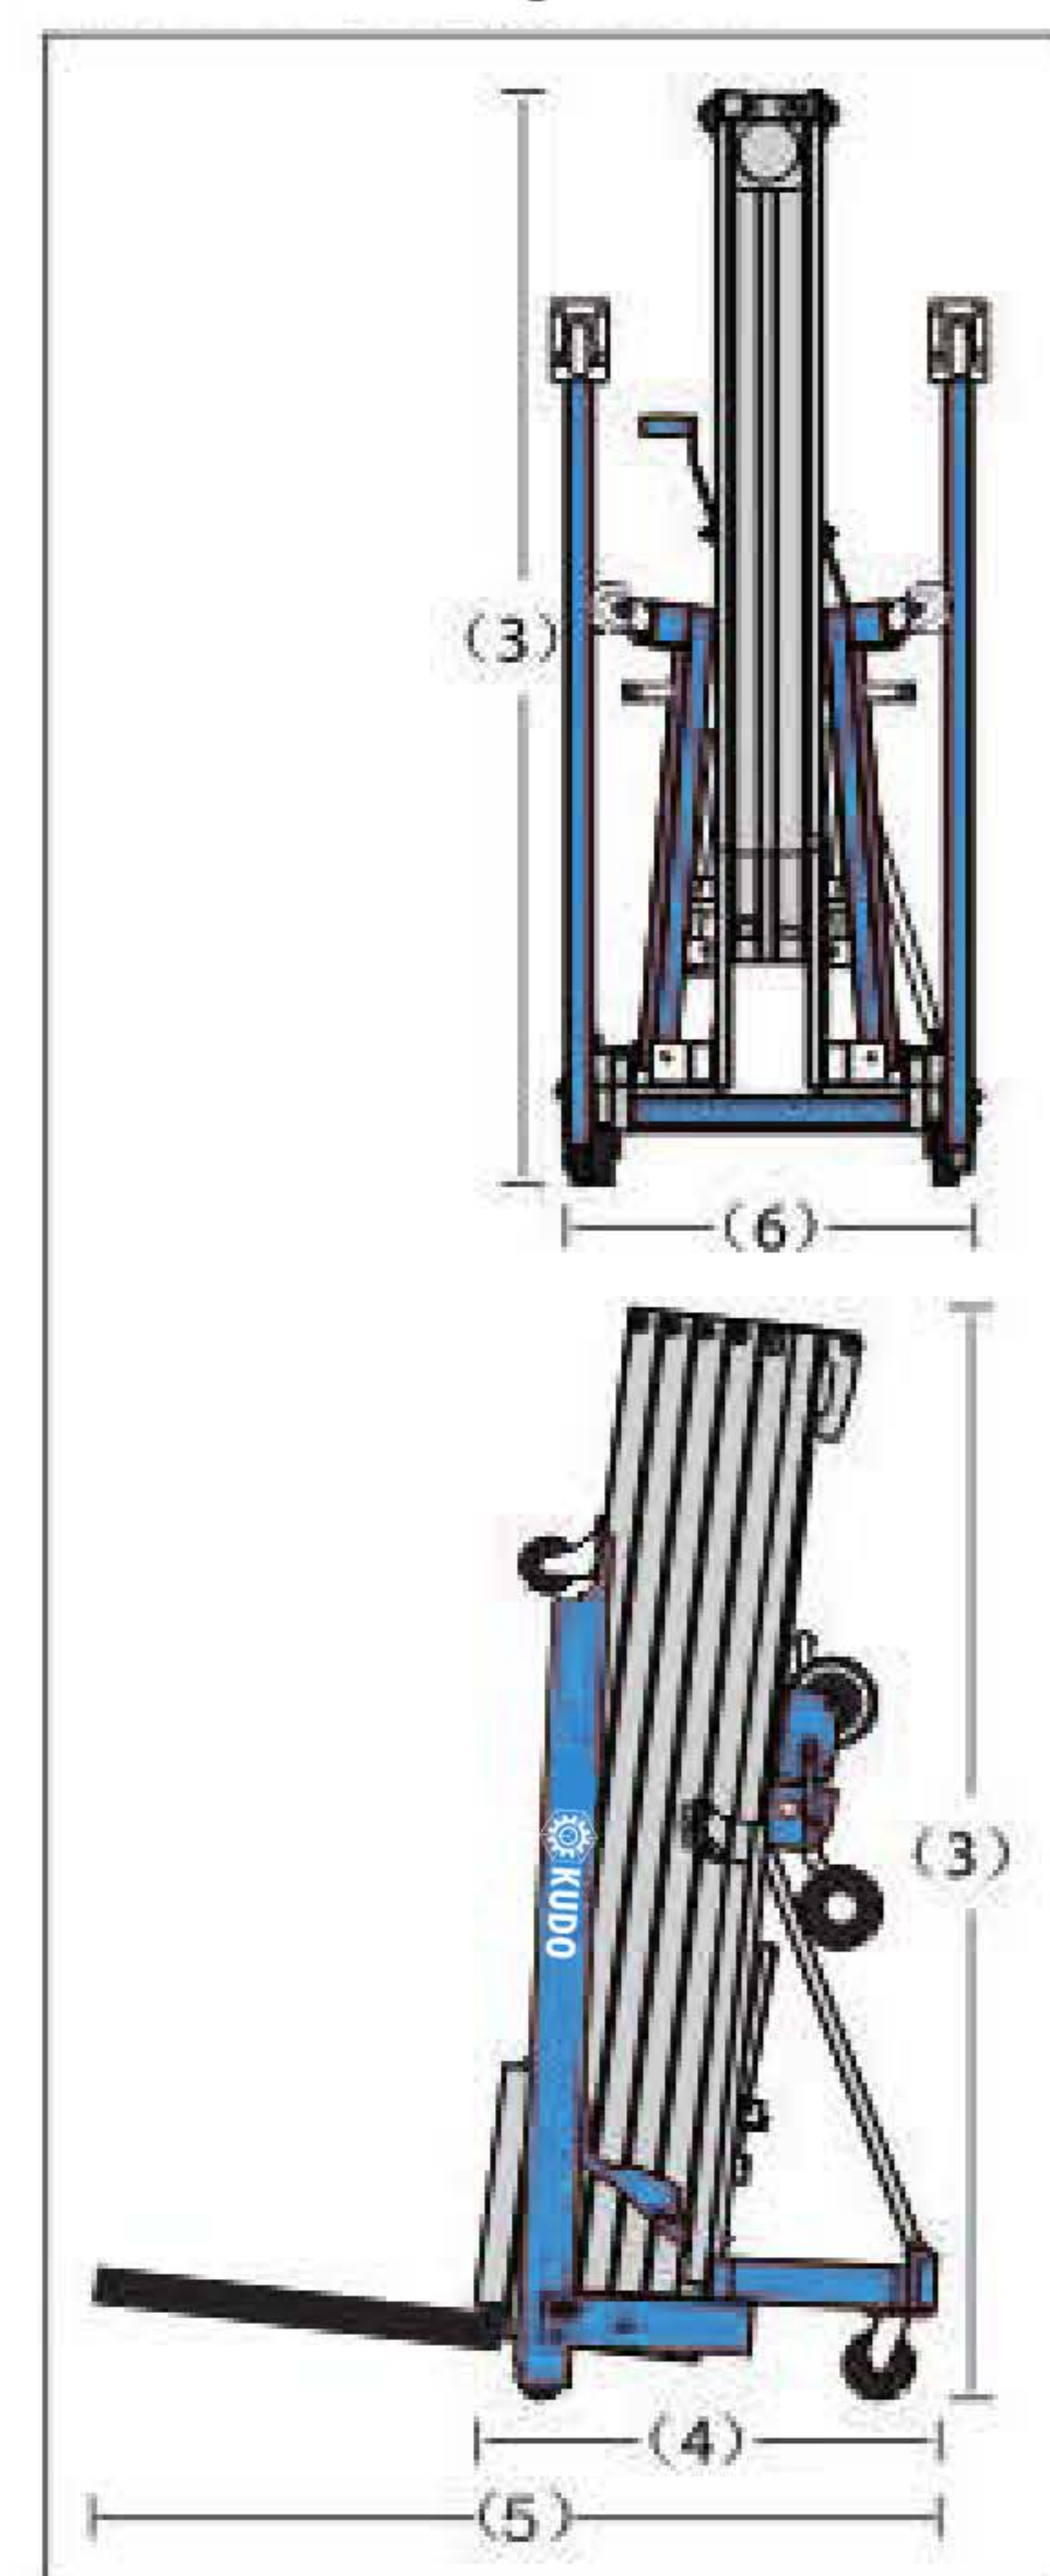

ALP Working Range

